



Ideal for use as:

- Informational kiosk
- Wayfinding point
- Internet terminal
- Survey & feedback / Data capture
- Electronic catalogue kiosk
- Advertising screen
- Fun interaction or learning tool

Why GP3?

- Wall mounted kiosk enables it to be fixed at any height making it ideal for use by children and wheelchair users.
- Space saving, robustly built to withstand hard knocks, blows and the ingress of dust and liquids.
- Bevel free, anti glare toughened glass frontage
- Easy to clean, even with alcohol based agents, and built to allow dirt no place to hide.
- 'Hook on and lock' steel wall mounting bracket, incorporating unique anti tamper locks. Designed to remove public access to the power and internet points.
- Fully brandable in wrap around vinyl to draw interest from passing traffic and encourage interaction with your messages
- Leasing options available for hardware and software.



Additional GP3 Options:*

- Keyboard (GP3K)
- Loyalty card reader
- Webcam
- Chip and pin
- RFID reader
- Barcode Scanner
- Armoured headset & handsets
- Backlit advertising panel affixed to the top
- Custom Vinyl Branding
- Bluetooth
- Wifi
- 3G comms

* may be subject to additional costs

Why Touch4?

- 15 years software and 10 years hardware experience
- ISO9001:2008 quality accredited
- End-to-end solution provider from specification to delivery and maintenance
- Products are manufactured by Touch4 in the UK which provides us with complete control over quality and support
- Modular systems allow for fast production
- Bespoke systems which can be created to suit you or your customer's needs
- Innovators and enthusiasts for the industry and the products we sell

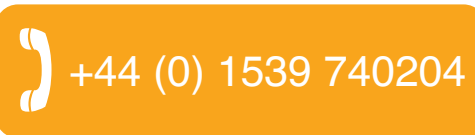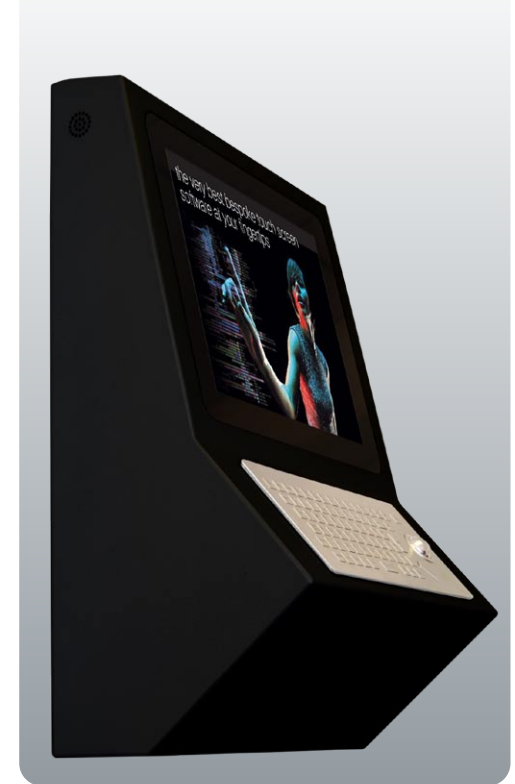



LCD Screen Specification:

LCD Display	17"/19" TFT Active Matrix
Max Resolution	1280 x 1024 SXGA
Contrast Ratio	800:1
Brightness	300 cd/m2 (typical)
Response Time	5 ms
Display Colour	16.7M
Pixel Pitch	0.264(h) x 0.264(w) mm
Viewing Angle	75/80°, 80/80°
Effective Display Area	17": 270(h) x 303(w) mm

LCD Operating Conditions:

Temperature	0°-50°C
Humidity	10%RH - 90%RH (operating)
Power Consumption	35W
Interface	VGA Input: D-Sub15pin
Power	110-240V, 50-60Hz

Dimensions:

	standard	keyboard
Height	680mm	684mm
Height to screen centre	470mm	500mm
Width	465mm	460mm
Depth	170mm	290mm
Weight	23 Kg	29 Kg



Touch Screen Specification:

Laminated 6mm safety glass fronted construction
IK10 Rated (5kg weight can be dropped from 450mm onto it without it breaking)
Accuracy - less than +/- 1.5% of reported position
Touch Technology - Projected capacitive
Response time - <20ms
Stability - no drift means no recalibration required
Pointing Device - gloved & ungloved finger
Environment - functionality is unaffected by surface contaminants - it is also unaffected by harsh cleaning fluids and other noxious substances
Operating temperature - from -35° to 65°C (with heaters and coolers - please specify environment when ordering)

Keyboard Specification:

All public facing materials manufactured from solid stainless steel with laser engraved symbols
Front Plate 2mm Brushed Stainless Steel
Operating life > 1 million operations
Robustness - 75N load on front face, (EN45001), sealed to IP65
Can be supplied with or without trackball

